

Merlin Carbon Monoxide Detector



Description

The XS range of CGS detectors work in combination with the CGS Merlin range of Gas Detection panels and Utility Controllers. Passive, semiconductor type sensor for industrial and commercial indoor applications. Compact, modern, digital design makes the units aesthetically pleasing and easy to install.

Application


Monitors boiler rooms, mechanical rooms, kitchens, hospitality and other commercial spaces involving Carbon Monoxide (CO). The XS range of detectors signal CGS Merlin controllers that an alarm condition has occurred. The detectors are suitable for all indoor applications and can be mounted onto single gang rough in box or directly onto a junction box.

Technical Specifications

Power Supply	7-30VDC, 80mA Max from Merlin Control Panel
Gas Sensor	Passive Semiconductor type sensor
Indicating Range	0-999ppm
Positioning of gas detector	60inch from the ground level
Warm up time for turning-on	1 minute
Temperature & Humidity Working Environment Ratings	Temperature - 149F (65C) Humidity - 90%
Low Level Alarm (Pre Alarm)	30 ppm
High Level Alarm	20 ppm for 2 hours 50 ppm for 1 hour 100 ppm for 10 minutes 300 ppm for 1 minute
Volt free relay output	240VAC 500mA, 30VDC 2A switching current (resistive load)
Net weight	180g
Installation	Wall Mountable Single Gang Rough In Box
Standards / Approvals	CE, UL



Merlin Carbon Monoxide Detector

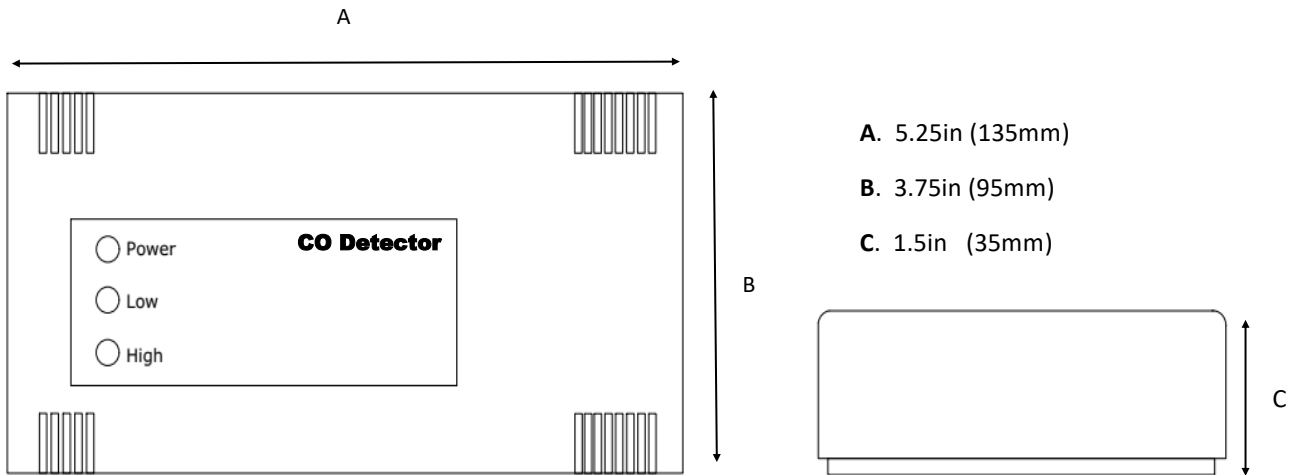

Warranty

3-year standard CGS warranty

Installation

18/4 AWG cable – Power 12v max – Signal Dry Contact

Coverage – 10m² (110ft²)

Avoid drafts – Avoid high temperatures - Mount 60inch from the ground level

Wire multiple Detectors as per manufacturer’s wiring instructions.

Max # of detectors per zone is 3 (GDP2 2 Zones, GDP4 4 Zones, 1000 range 1 Zone)

Agency Approvals

UL 2034 / UL 2075 UL 61010-1 3rd edition



info@canadiangassafety.com



www.canadiangassafety.com



647-577-1500